


SILENTAIRE Technology

So quiet you don't know it's there

SUPER SILENT 50-TC

1/2 HP, 0.9 Gal Tank.
2.00 CFM Free Air
84-114 PSI
Operating Pressure.
Voltage-110 V 60Hz.
Shipping
Weight-48 lbs.



SUPER SILENT AIR

All SUPER SILENT COMPRESSORS are virtually soundless and are totally automatic. Each unit includes a tank includes a tank pressure gauge, line pressure gauge, line pressure regulator, moisture trap/filter, safety-valve, air-intake filter and a handle for balanced carrvind.

moisture trap/filter, safety-valve, air-intake filter and a handle for balanced carrying.

SUPER SILENT 20-A

1/5 HP, 0.4 Gal. Tank


0.7 CFM Free Air

55-85 PSI Op-Pressure

Shipping Weight: 40lbs. Voltage: 110 V-60

Designed for one operator using 1 or 2 airbrushes.

Volt/Hz Volt/Hz	L/min C.F.M.	Lt. Gal.	Watt Watts	Bar Psi	Kg Lbs	L	W	H
220-240/50 110/60	17 0.7	1.5 0.4	135 180	6 85	18 40	200 8	460 18	310 12

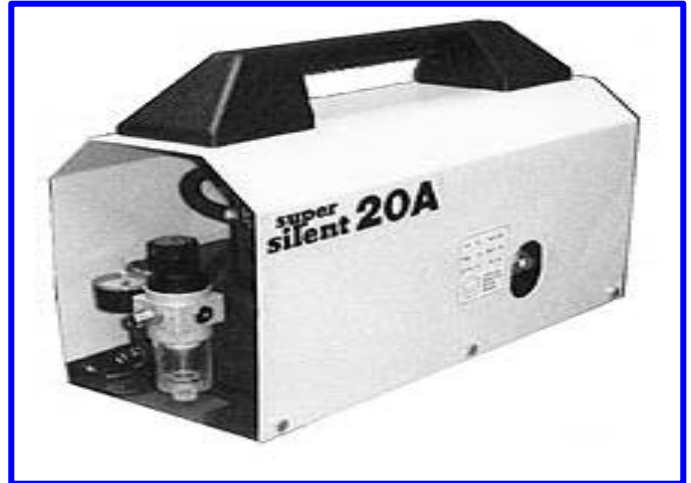

SUPER SILENT 30-TC

1/3 HP, 0.9 Gal. Tank


1.08 CFM Free Air

84-114 PSI Op-Pressure

Shipping Weight: 45lbs. Voltage: 110 V-60

Designed for one operator using 1 or 2 airbrushes.

Volt/Hz Volt/Hz	L/min C.F.M.	Lt. Gal.	Watt Watts	Bar Psi	Kg Lbs	L	W	H
220-240/50 110/60	30 1.08	3.5 0.9	200 239	8 114	20 45	300 12	380 15	370 15

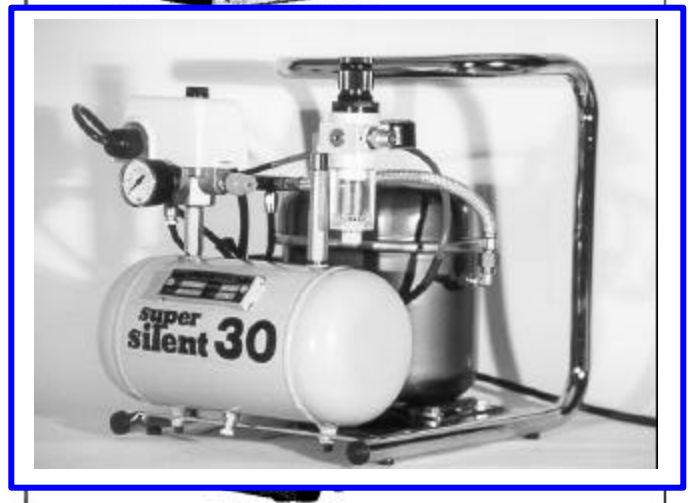

SUPER SILENT 50-TC

1/2 HP, 0.9 Gal. Tank

2.00 CFM Free Air

84-114 PSI Op-Pressure

Shipping Weight: 48lbs. Voltage: 110 V-60.

Designed for "Heavy-Duty" use. One operator using 3 or 4 airbrushes.

Volt/Hz Volt/Hz	L/min C.F.M.	Lt. Gal.	Watt Watts	Bar Psi	Kg Lbs	L	W	H
220-240/50 110/60	50 2.00	3.5 0.9	340 400	8 114	22 48	300 12	380 15	370 15

